

Job Name:

System Reference:

Date:



kumo cloud®



Download on the App Store

GET IT ON Google play

available at amazon appstore

WORKS WITH alexa

works with the Google Assistant

Works with IFTTT



## SPECIFICATIONS

- Allows for a Mitsubishi Electric indoor unit to be controlled remotely or locally with to the kumo cloud® app
- Available in:
  - Apple App Store
  - Google Play
  - Amazon Appstore
- Group units together
- Organize groups into Sites
- Batch command units
- Program in events to schedule the units
- Fahrenheit or Celsius
- Error and filter pop-up
- Automatic or Manual Setup to add units
- In-app setup of M-Series and P-Series advanced function settings
- Transfer Ownership feature to move sites between user accounts
- Lock only one zone access per smartphone or tablet
- RF Channel: 1ch - 11ch
- Radio protocol: IEEE 802.11b/g/n (20) - 2.4 GHz only
  - Only compatible with 2.4GHz Wi-fi signal
- Encryption: AES
- Authentication: PSK
- Works with the Google Assistant
- Works with Amazon Alexa





## REQUIREMENTS

- Compatible wireless enabled Mitsubishi Electric indoor units
  - See remote controller compatibility charts on page 2
- Wireless Router:
  - Internet access required for initial setup and scheduling
- Mitsubishi Electric Wireless Interface 2 (PAC-USWHS002-WF-2)
- Compatible software platforms
  - iOS 9.1 or later
  - Android 4.1 or later
  - Fire OS 4.1 or later

Works with IFTTT, Download on the App Store, Get it on Google Play, and Available at amazon appstore.

Amazon, Alexa and all related logos are trademarks of Amazon.com, Inc. or its affiliates.

Google Assistant is a registered trademark of Google, Inc.

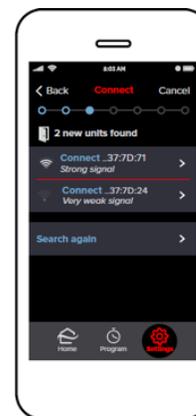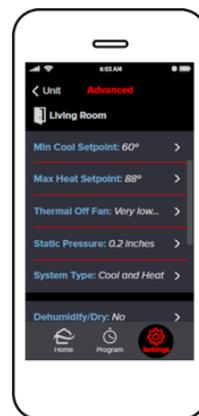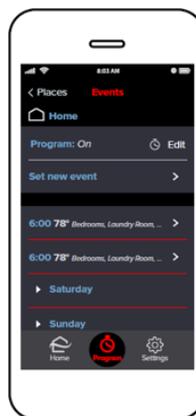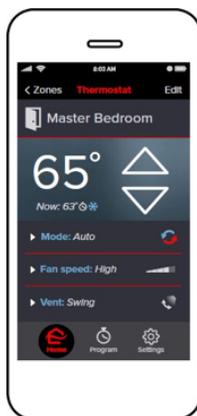

# COMPATIBILITY CHART

CITY MULTI®	
PMFY-NMBU	(E) NO (ER5) OK (After April 2012)
PEFY-NMU	(NMU-E) NO (After April 2012)
PEFY-NMAU	(E) NO (E2) OK (E3) OK (After April 2012)
PEFY-NMHSU	(E) OK (After Oct 2015)
PEFY-NMHU	(E) NO (E2) OK (After April 2012)
PEFY-NMLU	(E) NO
PEFY-NMSU	(E) NO (ER2) OK (After June 2012)
PLFY- NAMU	(A) NO (E) NO
PLFY- NBMU	(E) NO (ER2) OK (After April 2012)
PLFY- NCMU	(E) NO (ER4) OK (After June 2012)
PLFY- NFMU	(E) YES
PLFY- NLMU	(E) NO
PCFY- VKM	NO
PCFY- NGMU	(E) NO
PCFY- NKMU	(E) NO (E.TH) NO (ER1.TH) OK (After June 2012)
PFFY-NEMU	(E) OK (After April 2012)
PFFY-NRMU	(E) OK (After April 2012)
PVFY-E00	(A) OK (B) OK (After April 2012)
PVFY-NAMU	(E) OK (After April 2012)
PKFY-NAMU	(E) NO
PKFY-NFMU	(E) NO
PKFY-NGMU	(E) NO
PKFY-NBMU	(E) NO (E2) OK (After April 2012) (E2R1) OK (After April 2012)
PKFY-NHMU	(E) NO (E2) OK (After May 2012)
PKFY-NKMU	(E) NO (E2) OK (After June 2012) (E2.TH) ADPT (After June 2012)

P-Series	
PCA	(GA) NO (KA) OK (KA4) OK (KA4.TH) OK (KA6) OK (KA7) OK (After April 2012)
PEA	(AA) NO (AA4) OK (AA4R1.TH) OK (AA6) OK (After April 2012)
PEAD	(AA) NO (AA4) OK (AA5) OK (AA7) OK
PKA	(FA) NO (GA) NO (HA) NO (HAL) NO (HA4) OK (HA6) OK (HA7) OK (KA) NO (KA4) OK (KA6) OK (KA7) OK
PLA	(AA) NO (BA) NO (BA-1) NO (BA4) NO (BA6) NO (EA7) OK
PVA	(AA4) OK (AA7) OK

M-Series	
MFZ-KA	OK
MFZ-KJ	OK
MSZ/Y-A	NO
MSZ/Y-D	(NA) OK (NA-8) OK
MS-WA	NO
MSZ-FD	NO
MSZ-FE	09, 12 (NA) OK 09, 12 (NA-8) OK 18 (NA) OK
MSZ-EF	OK
MSZ/Y-GE	06 to 18 (NA) NO (NA-8) OK (NA-9) OK 24 (NA) OK
MSZ/Y-GL	OK
MSZ-FH	OK
MSZ-HE	NO
MSZ-HM	OK
MSY-HM	NO
MVZ	(AA4) OK (AA7) OK
SVZ-KP	OK
SEZ-KD	(NA) OK (NA4) OK
SLZ-KA	OK
SLZ-KF	OK
MLZ-KP	OK
MSZ-JP	OK
MSZ-WR	OK

### LEGEND

OK = Compatible

NO = Not compatible

ADPT = Install IT signal adapter PAC-IT51AD-E or PAC-IT52AD-E for compatibility

1340 Satellite Boulevard, Suwanee, GA 30024  
Toll Free: 800-433-4822 [www.mehvac.com](http://www.mehvac.com)